RON MAN 5" Seamless Rollformer



New upright, tension brake, aluminum spool and coil scale

Polyurethane Drive Train

BON MAN

- Eliminates the need to load coil prior
- to transportation (less material waste)
- Rollform 24 gauge steel
- Eliminates slippage from cold weather and condensation

2 YEAR WARRANTY ON PARTS

.002 Hard Chrome Plated Steel Forming Rollers

- Rollforms all recommended materials with minimal or no adjustment
- Free-floating forming rollers produce less pressure and allow

for more product uniformity

Electrical and Control System

- Push button entry and exit end controls with safety wiring and "jog" feature
- 3/4 HP, 110 volt, single phase motor, 13.6 ampere

Structural Steel Frame •Welded tubular frame



Modular Turnstile Upright System & Transfer Bars

• Transfer bars (ease of coil loading)



Power

3/4 HP, 110 volt, single phase, 13.6 ampere, totally enclosed fan cooled (T.E.F.C.) motor

Dimensions

Length – 98 1/2" (250.2 cm) Height – 48" (122.0 cm) Width – 24" (61.0 cm)

Weight Approximately 1,100 lbs. (499.0 kg)

Drive

Powered polyurethane drive rollers via chains and sprockets

Shear Front pull guillotine

Speed Approximately 35 feet per minute

Controls


Push button entry and exit end controls with "jog" feature

Recommended Materials

Maximum width 11 3/4" to 12 3/8"MaterialMaximum GaugePainted Steel24Galvanized Steel24Aluminized Steel24Ternecoat Steel24Aluminum.032Copper16 oz.-20 oz. 3/4 hard

Options

- Machine mount cradles
- Additional runout support stands
- CE Certified wiring
- Additional turnstiles
- Additional spools
- Alcoa style hook
- 12 volt, DC power
- Box gutter
- Roof flange 1"
- Trailer riser pad

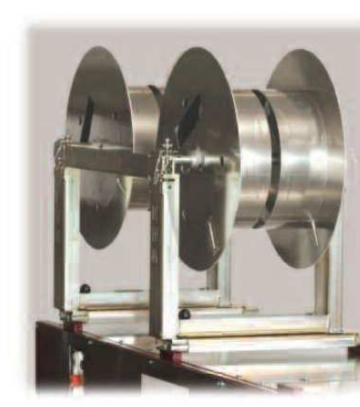

Quick release turnstile and transfer bars

