



5" Seamless Rollformer



New upright, tension brake, aluminum spool and coil scale

**2 YEAR WARRANTY
ON PARTS**

Standard Equipment

- Front pull guillotine
- Seven station aluminum box
- Emergency shutdown switch
- Easy adjust entrance guides
- Two quick release runout stands

Standard Upright System

- 2 spool turnstile upright & 2 aluminum spools
- New aluminum spools less than half the weight of steel spools
- Modular upright system distributes the weight of the coils to the floor of the vehicle, not the machine
- Coil tension brake
- Transfer bar





5" Seamless Rollformer

Dimensions

Top of spools to the bottom of machine 46".
Width 23". Length 96" with straight blade
guillotine. 99" with front pull guillotine.

Construction

3/8" steel frame welded on a jig fixture for
accuracy. Fully enclosed with 7 gauge steel
sides. All parts individually plated or painted
prior to assembly.

Drive/Forming Rollers

Twelve drive forming rollers—5 bottom, 7
top. Rollers are 1045 high carbon steel with
.002 industrial hard chrome.

Weight

1,200 lbs.

Power

3/4 HP, high torque sealed motor. 20-1 gear
reduction unit. Machine plugs directly into
110–120V outlet.

Production

Approximately 35 feet per minute


Recommended Materials

Maximum width 11 3/4" to 12 3/8"

Material	Maximum Gauge
Aluminum	.032
Painted Steel	26
Copper	16 oz. 3/4 hard

Options

- Straight blade guillotine
- Additional runout support stands
- 220 volt/50hz.
- Single, double or triple spool upright
available
- Turnstile machine mount cradle
- CE Certification
- 12 volt DC power
- Trailer riser pad

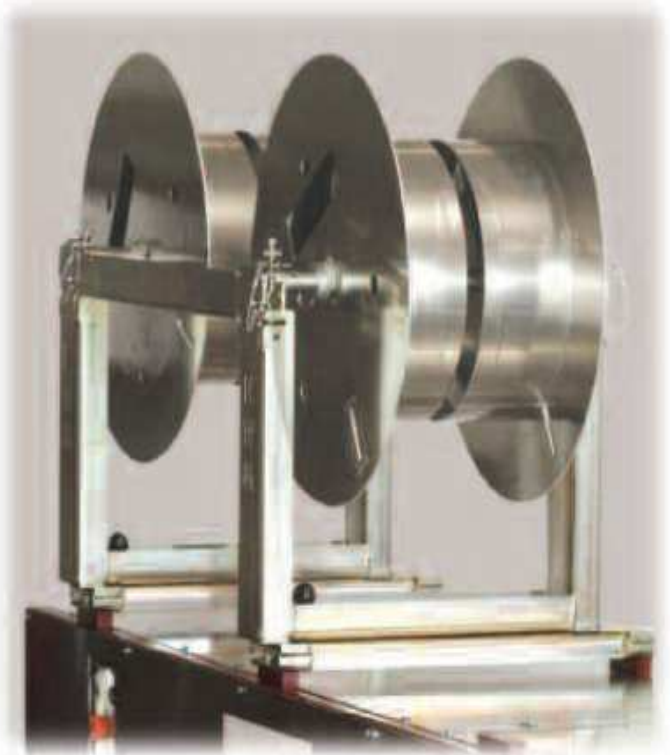

Quick release turnstile and transfer bars

