




# IRON MAN

## 5 1/2" Fascia Gutter

Also available in 4 1/2"

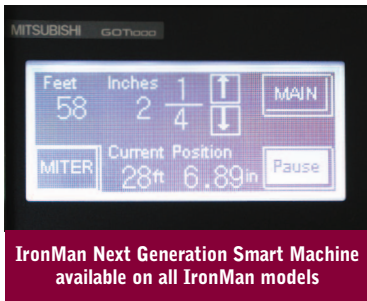

IronMan Next Generation Smart Machine  
available on all IronMan models

Use the touch screen to automatically control product length, add for miters, if applicable, and keep a total of daily material ran and total footage. Password protected.



### Polyurethane Drive Train

- Eliminates the need to load coil prior to transportation (less material waste)
- Eliminates slippage from cold weather and condensation
- Rollforms all standard metals with minimal or no adjustment

### Modular Turnstile Upright System

### Electrical and Control System

- Push button entry and exit end controls with safety wiring and "jog" feature
- 3/4 HP, 110 volt, single phase motor, 13.6 ampere

### Structural Steel Frame

- Welded tubular frame

**ROCK SOLID GUARANTEE: 3-YEARS Parts & Labor/Mechanical ▪ 1-YEAR Parts & Labor/Electrical**

[www.GutterSupply.com](http://www.GutterSupply.com)

19 Skokie Valley Road, Lake Bluff, Illinois 60044 ▪ E-mail [sales@guttersupply.com](mailto:sales@guttersupply.com)

Phone (847) 283-0006 ▪ Fax (847) 283-0007 ▪ Toll-free (888) 909-RAIN





# IRON MAN

## 5 1/2" Fascia Gutter

### SPECIFICATIONS

<p><b>Power</b> 3/4 HP, 110 volt, single phase, 13.6 ampere, totally enclosed fan cooled (T.E.F.C.) motor</p>	<p><b>Dimensions</b> Length – 151" (383.54 cm) Height – 49" (124.46 cm) Width – 24" (61.0 cm)</p>													
<p><b>Weight</b> Approximately 1,375 lbs. (624 kg)</p>	<p><b>Drive</b> Powered polyurethane drive rollers via chains and sprockets</p>													
<p><b>Shear</b> Front pull guillotine</p>	<p><b>Speed</b> Approximately 35 feet per minute</p>													
<p><b>Controls</b> Push button entry and exit end controls with "jog" feature</p>	<p><b>Options</b></p> <ul style="list-style-type: none"> <li>▪ Smart Machine (automated length control)</li> <li>▪ Machine mount cradles</li> <li>▪ Fixed upright system</li> <li>▪ Additional runout support stands</li> <li>▪ CE Certified wiring</li> <li>▪ Additional turnstiles</li> <li>▪ Additional spools</li> <li>▪ Flange assembly for roofing</li> </ul>													
<p><b>Recommended Materials</b> 14" and 15" wide</p> <table border="0"> <thead> <tr> <th>Material</th> <th>Maximum Gauge</th> </tr> </thead> <tbody> <tr> <td>Painted steel</td> <td>24</td> </tr> <tr> <td>Galvalume</td> <td>24</td> </tr> <tr> <td>Aluminized steel</td> <td>24</td> </tr> <tr> <td>Ternecoat steel</td> <td>24</td> </tr> <tr> <td>Aluminum</td> <td>.032</td> </tr> <tr> <td>Copper</td> <td>16 oz.–20 oz. 3/4 hard</td> </tr> </tbody> </table>		Material	Maximum Gauge	Painted steel	24	Galvalume	24	Aluminized steel	24	Ternecoat steel	24	Aluminum	.032	Copper
Material	Maximum Gauge													
Painted steel	24													
Galvalume	24													
Aluminized steel	24													
Ternecoat steel	24													
Aluminum	.032													
Copper	16 oz.–20 oz. 3/4 hard													

[www.GutterSupply.com](http://www.GutterSupply.com)

19 Skokie Valley Road ■ Lake Bluff, Illinois 60044 ■ E-mail [sales@guttersupply.com](mailto:sales@guttersupply.com)

Phone (847) 283-0006 ■ Fax (847) 283-0007 ■ Toll-free (888) 909-RAIN

