

Innovation. Quality. Versatility.

The World's Finest Portable Rollforming Equipment



SSR[™] Roof Panel Machine


www.GutterSupply.com 1-888-909-RAIN Info@GutterSupply.com

The World's Finest Portable Rollforming Equipment

SSR™ MultiPro Jr.

Residential / Light Commercial Multi-Profile Roof Panel Machine

The state-of-the-art SSR MultiPro Junior Roof Panel Machine can produce up to SEVEN different panel profiles in variable widths, multiple gauges and various material types.



STANDARD FEATURES		
Polyurethane Drive Rollers	Powder-Coated Frame & Covers	
Length Control Limit Switch	100-Foot, 10 Gauge, 20 Amp Extension Cord	
Waterproof NEMA 4 Electrical System	(2) Run-Out Tables (10-Foot Sections Each)	
Forward Pulling, Easy Cut Shear	One Expandable Arbor / Reel	
Push Button RUN/JOG Controls at Entry & Exit Ends	Welded Tubular Steel Frame	
Choice of: EZE-Change™ Profile Roller System	UL Rated Panels (Must Be Certified by UL for Recognition)	
Choice of: One Pair of Bead, Pencil, Striation or V-Rib Rollers	Industry's Best Warranty	
Dual Overhead Reel Rack		


PANEL MACHINE gth	12' 10" (3.9m) 3' 10" (1.2m)	
	3′ 10″ (1.2m)	
·h		
ıht	4' 3" (1.3m) with Over Head Rack 1' 10" (.6m) without Over Head Rack	
ght	2,275 lbs. (1,030kg)	
ON TRAILER		
yth	17′ 6″ (5.3m)	
th	7' (2.1m)	
ht	6' 3" (1.9m) with Reel	
ght	3,975 lbs. (1,800kg)	
_ WIDTHS		
to 20" (380mm to 508mm)		
XIMUM COIL DIAMETER		
812mm) with the Overhead Reel Rack		
1,143mm) with the Free Standing Decoiler		
SHED PANEL WIDTHS		
10" to 16" (254mm to 406mm) - Note: Variable Depending on Panel Profile		
ERIALS FORMED		
ted Steel	30 ga. to 24 ga. (.3mm to .6mm) (painted, galvanized, aluminized)	
ted Aluminum	.027" to .040" (.7mm to 1.0mm)	
per	16 oz. to 20 oz. 3/4 Hard (.5mm to .7mm)	
AR		
ually Powered, Infinitely Adjustable, Hardened Tool Steel Bl	ades & Shear Dies	
/E		
Electrically Driven Polyurethane Rollers via Chain & Sprocket		
ED .		
./min (9m/min) Approx.		

The World's Finest Portable Rollforming Equipment

SSR™ Panel Profiles (Choice of)



These field formed panels have demonstrated compliance with UL580, Class 90 when a UL certificate accompanies the machine producing panel.

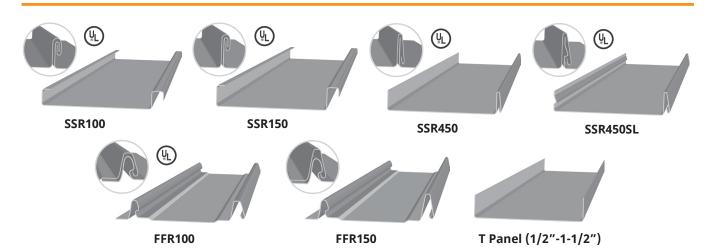

PROFILES		
SSR100 * †	1" high x 1/2" wide (25.4mm x 12.7mm) mechanically seamed panel. Includes a hand seamer and clip relief.	
SSR150 * †	1-1/2" high x $1/2$ " wide (38.1mm x 12.7mm) mechanically seamed panel. Includes a hand seamer and clip relief.	
SSR450 * / 450SL *	1-1/2" high x 1/4" wide (38.1mm x 6.4mm) snap clip panel / snap lock panel. Includes clip relief rollers.	
FFR100	1 " snap seam (25.4mm) with slotted fastener flange for clipless installation. Includes clip relief rollers and automatic "no chip" rotary slotter.	
FFR150	1-1/2" snap seam (38.1 mm) with slotted fastener flange for clipless installation. Includes clip relief rollers and automatic "no chip" rotary slotter.	
T-Panel	1/2" to 1-1/2" high (12.7mm to 38.1mm)	

- * Can make T-Panel † Suitable for Zinc All roller systems include shear dies and clip relief rollers.
- SSR100, SSR150 and SSR450/450SL Roller Systems all use identical left side roller sets.
- FFR100 and FFR150 also share identical left side roller sets.

If you purchase or own one of these roller systems, you can add any of the other right side systems at a reduced price!

- Warranty: Three years parts (including electrical) / Three years labor Limited lifetime separation on drive rollers

 - Limited lifetime on stainless steel forming rollers

U.S. PATENT NO. 6,772,616

Rib Roller Options











CLIP RELIEF

BEAD RIBS (STANDARD OR WIDE)

PENCIL RIBS (SMALL OR LARGE)

V-RIBS (SMALL OR LARGE)

STRIATION RIBS

Innovation. Quality. Versatility.

The World's Finest Portable Rollforming Equipment

The NTM Roof Panel Machine Family:









Check Out the SSR Online:





www.GutterSupply.com 1-888-909-RAIN Info@GutterSupply.com Proud Members of:





